




558 MODEL SHOTBLASTER

Product details:

The 558 Model is the most efficient shotblaster currently available on the market with proven reduced running costs against competitor models for road re-texturing, decontamination projects, airport refurbishment and floor preparation. Manufactured from the highest quality materials for strength and durability, every aspect of the 558 has been designed to perform reliably including easy to use, precise controls.

Features:

- Excellent production rates exceeding competitor models, with dual wheel design
- Infinitely variable drive control
- Width of blast pattern can be reduced for line removal and weld inspection
- 3 Filter Filtration Unit for improved suction and dust control

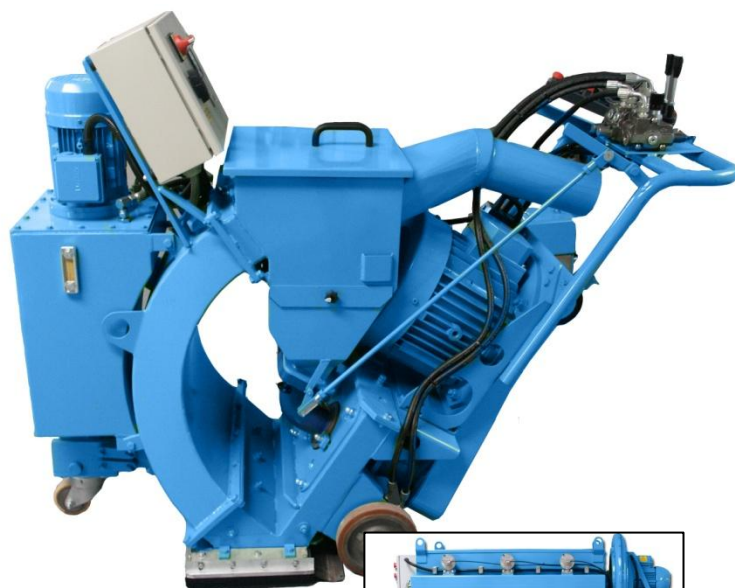

Applications:

- Removal of coatings and contaminants on a wide range of background surfaces
- Steel preparation to SA3 standard surface re-texturing
- Laitance removal on new concrete



558 SHOTBLASTER MACHINE SPECIFICATION

Dimensions	H 1220mm	L 1600mm	W 680mm
Application width	Up to 558mm	Weight	700kg
Motor	22kW		
Power	415v / 3 phase / 63 amp		
Hand-Arm Vibration Level	2.8m/s ² r.m.s	Usage	up to 7 hours

3 FILTER COLLECTION UNIT

Dimensions	H 1700mm	L 2000mm	W 720mm
Weight	517kg	Capacity	200 Litre
Fan Motor	4kW	Compressor Motor	2.2kW
Power	415v / 3 phase / 63 amp		



558 MODEL SHOTBLASTER

ACCESSORIES



Tuning Kit
BLAST-018
(2 required)

Liners

- Top**
BLAST265-021
- Centre Liner Top**
BLAST558-004
- Centre Liner Bottom**
BLAST558-006

Side
BLAST-035



Brush Seals
Side
BLAST558-051

Front
BLAST558-050



Magnets
Front
BLAST558-019

Side
BLAST558-021
(2 required)



Back Skid Seal
BLAST558-015
(2 required)



Magnetic Sweeper
SWEEPER-001



Steel abrasive / Shot
390 Grade 1.0 – 1.4mm – SHOT0390
460 Grade 1.2 – 1.7mm – SHOT0460
550 Grade 1.4 – 2.0mm – SHOT0550